
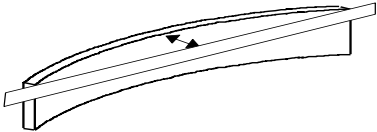
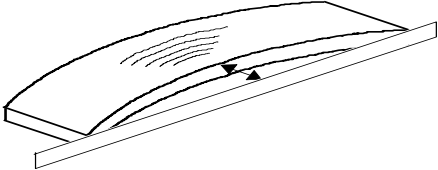
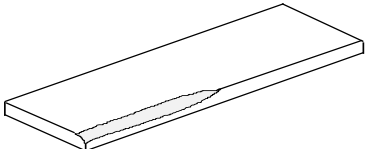
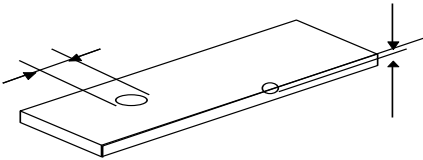




Date: 11.06.2020	C
Main profiles	Interior cladding, exterior cladding, flooring, decking, four-sides planed timber
Slash (spike, splay) knots	No restrictions.
Sound (incl. black) knots	No restrictions.
Unsound rotten knots	No restrictions.
Bark-ringed knots	No restrictions.
Loose knots or knotholes	No restrictions.
Max. permitted knots per meter	No restrictions.
Checks	No restrictions.
End splits	No restrictions.
Ring shakes	No restrictions.
Wane and mechanical damages	Permitted on the hidden and unused side of the profile.
Resin pockets	No restrictions.
Bark pocket, scar	No restrictions.
Compression wood	No restrictions.
Fungus infection (mould, blue stain, rot)	Mould is not permitted. Blue stain or dote permitted.
Insect damage	No restrictions.
Moisture content	16 ± 2 %
Surface quality	Max. permitted length of hit & miss surface on the visible sides is 4x of the board width. Hit & miss surface on the edges of the visible sides permitted in max. 20% of the volume, till 20% of the board width on the worst side.
Tolerance	Length: ± 10 mm, end matched boards ± 50 mm Thickness: ± 0,5 mm Width: ± 0,5 mm
	All the conditions are valid unless agreed otherwise. Max 5% deviation in quality grading allowed from total volume.

<p>Twist</p> 	<p>No restrictions.</p>
<p>Bow</p> 	<p>No restrictions.</p>
<p>Edge bow (crook)</p> 	<p>No restrictions.</p>
<p>Wane</p> 	<p>Permitted on the hidden and unused side of the profile provided installation of the board is not restricted.</p>
<p>Knots</p> 	<p>For details on cross-sections see page 1.</p>
<p>Discoloration (rot, fungus, blue stain)</p> 	<p>Early discoloration (dote) and blue stain permitted. Fungus is not permitted.</p>
<p>Checks and end splits</p> 	<p>No restrictions.</p>