


---

# VIKING solid wood exterior cladding

---

These solid wood cladding boards are suitable for the exterior finishing of buildings. The cladding boards are good for both covering the facades of new buildings and the renovation of old buildings. We recommend UTK profiles mainly for horizontal installation.

The surface is fine-grooved. One of the major advantages of fine-grooving is the excellent paint absorption, ensuring the durability and beautiful appearance of the cladding boards for a long time.

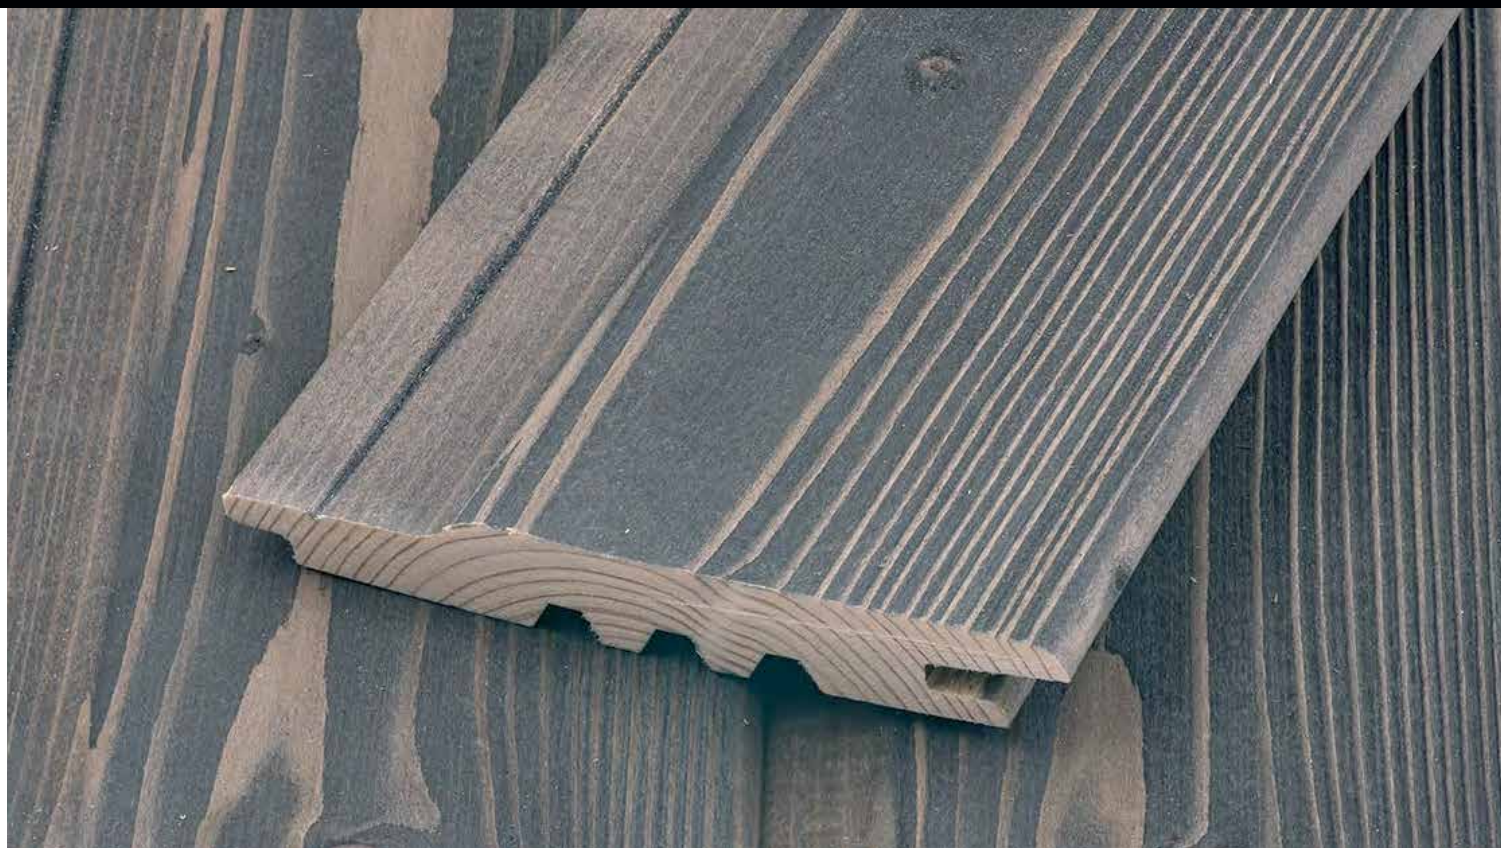

---

This is a very practical profile, with a lot of work already done for the customer or builder.

---

Industrial painting creates a flawless surface and ensures longer durability and weather resistance.

---

Tongue-and-groove cladding boards can be installed like parquet boards, i.e. effectively minimising losses due to different lengths.

---



Anthracite grey 1826

- Species: spruce
- Covered area (useful): 3.09 m<sup>2</sup> (6 pcs) per package
- Surface treatment: fine-grooved, painted
- Colour: anthracite grey 1826
- Profile: UTK/OT, tongue-and-groove
- Dimensions: 19 × 146 mm
- Cover width: 123 mm
- Length: 4200 mm (net length: 4157 mm)
- Environmentally friendly material
- Package dimensions: 114 × 146 × 4200 mm



---

OÜ Puidukoda  
Karksi küla, Mulgi vald, 69104 Viljandi maakond, Eesti  
Phone: +372 433 8690  
Fax: +372 433 8691  
info@puidukoda.eu



**PUIDUKODA**  
WOOD FOR LIFE

**WOODMOOD**

[www.puidukoda.eu](http://www.puidukoda.eu)